


RCCN 日成SDR型密封环保阻燃线槽 Solid Wiring Duct

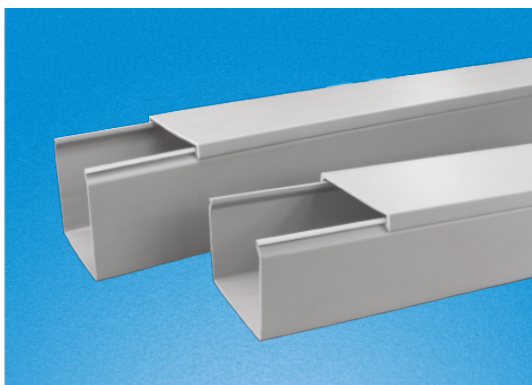

产品材质:采用低卤素硬质PVC料制成,环保无污染,不含铅等有毒物。
 产品认证:美国UL:E306674 欧洲CE,欧洲环保RoHS,REACH。
 防火等级:UL94V-0,低烟微卤,遇火不燃烧,防火性及绝缘性特佳。
 产品构造:由槽底及槽盖组成。
 颜色:灰色,白色,蓝色,黑色(可定制其它颜色,有起订量要求)
 工作温度:静态-40°C持续高温至65°C,短时间可达85°C。
 使用方法:先将底槽固定,将所要配的线装入槽内,盖上槽盖即可。
 产品特性:1.反扣式槽盖与槽体设计组合后绝不脱落,且接合面平滑,不割伤手及擦损附近配线。
 2.配线槽65°C内不易断裂,变形,变色,装配省时便利。

更多选择:量大可按需求生产所需规格或定制长度.例:SDR8080(L=1.8M)

Solid wall design fully encloses cables providing maximum protection and aesthetics

Certificates:UL:E306674 CE:EN50085 RoHS,REACH.


Made of rigid PVC

Work Temperature:-40°C to 65°C

UL94 Flammability Rating of V-0

Supplied without mounting holes

Available color:gray.white.blue.black and other special colors



本系列产品均可制成面带孔规格。

Comment : gray is the common color, other color need more MOQ


单位/Unit:mm

型号 Item No.				宽 × 高 High X width W×H	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005			
SDR1616	SDR1616W	SDR1616E	SDR1616B	16×16	3~10pcs	每支 2米 含槽底槽盖
SDR2516	SDR2516W	SDR2516E	SDR2516B	25×16	5~15pcs	
SDR4016	SDR4016W	SDR4016E	SDR4016B	40×16	15~30pcs	
SDR1520	SDR1520W	SDR1520E	SDR1520B	15×20	8~12pcs	
SDR2020	SDR2020W	SDR2020E	SDR2020B	20×20	10~20pcs	
SDR4020	SDR4020W	SDR4020E	SDR4020B	40×20	20~30pcs	
SDR1525	SDR1525W	SDR1525E	SDR1525B	15×25	5~15pcs	
SDR2025	SDR2025W	SDR2025E	SDR2025B	20×25	5~15pcs	
SDR2525	SDR2525W	SDR2525E	SDR2525B	25×25	10~25pcs	
SDR3025	SDR3025W	SDR3025E	SDR3025B	30×25	12~28pcs	
SDR4025	SDR4025W	SDR4025E	SDR4025B	40×25	20~25pcs	
SDR5025	SDR5025W	SDR5025E	SDR5025B	50×25	20~30pcs	
SDR1530	SDR1530W	SDR1530E	SDR1530B	15×30	8~15pcs	
SDR2030	SDR2030W	SDR2030E	SDR2030B	20×30	25~35pcs	
SDR2530	SDR2530W	SDR2530E	SDR2530B	25×30	25~35pcs	
SDR3030	SDR3030W	SDR3030E	SDR3030B	30×30	25~35pcs	
SDR4030	SDR4030W	SDR4030E	SDR4030B	40×30	30~40pcs	
SDR5030	SDR5030W	SDR5030E	SDR5030B	50×30	40~50pcs	
SDR6030	SDR6030W	SDR6030E	SDR6030B	60×30	50~60pcs	
SDR2233	SDR2233W	SDR2233E	SDR2233B	22×33	15~25pcs	Pcs/Branch 2M Including truning and lids
SDR3333	SDR3333W	SDR3333E	SDR3333B	33×33	30~40pcs	
SDR2035	SDR2035W	SDR2035E	SDR2035B	20×35	30~40pcs	
SDR3535	SDR3535W	SDR3535E	SDR3535B	35×35	35~45pcs	
SDR5035	SDR5035W	SDR5035E	SDR5035B	50×35	40~60pcs	
SDR1540	SDR1540W	SDR1540E	SDR1540B	15×40	20~25pcs	
SDR2040	SDR2040W	SDR2040E	SDR2040B	20×40	20~25pcs	
SDR2540	SDR2540W	SDR2540E	SDR2540B	25×40	20~25pcs	
SDR3540	SDR3540W	SDR3540E	SDR3540B	35×40	50~60pcs	
SDR4040	SDR4040W	SDR4040E	SDR4040B	40×40	60~70pcs	
SDR6040	SDR6040W	SDR6040E	SDR6040B	60×40	100~115pcs	
SDR8040	SDR8040W	SDR8040E	SDR8040B	80×40	120~135pcs	
SDR10040	SDR10040W	SDR10040E	SDR10040B	100×40	120~135pcs	
SDR12040	SDR12040W	SDR12040E	SDR12040B	120×40	140~165pcs	
SDR2545	SDR2545W	SDR2545E	SDR2545B	25×45	20~25pcs	
SDR3345	SDR3345W	SDR3345E	SDR3345B	33×45	40~55pcs	
SDR4545	SDR4545W	SDR4545E	SDR4545B	45×45	60~70pcs	
SDR6545	SDR6545W	SDR6545E	SDR6545B	65×45	110~120pcs	

RCCN 日成SDR型密封环保阻燃线槽 Solid Wiring Duct

型号 Item No.				宽 × 高 High X width W×H	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005			
SDR2050	SDR2050W	SDR2050E	SDR2050B	20×50	20~30pcs	每支 2米 含槽底槽盖
SDR2550	SDR2550W	SDR2550E	SDR2550B	25×50	20~30pcs	
SDR3050	SDR3050W	SDR3050E	SDR3050B	30×50	25~40pcs	
SDR3550	SDR3550W	SDR3550E	SDR3550B	35×50	40~60pcs	
SDR4050	SDR4050W	SDR4050E	SDR4050B	40×50	60~70pcs	
SDR4550	SDR4550W	SDR4550E	SDR4550B	45×50	70~80pcs	
SDR5050	SDR5050W	SDR5050E	SDR5050B	50×50	80~90pcs	
SDR5550	SDR5550W	SDR5550E	SDR5550B	55×50	85~95pcs	
SDR6050	SDR6050W	SDR6050E	SDR6050B	60×50	100~120pcs	
SDR7550	SDR7550W	SDR7550E	SDR7550B	75×50	150~170pcs	
SDR8050	SDR8050W	SDR8050E	SDR8050B	80×50	160~180pcs	Pcs/Branch 2M Including tuning and lids
SDR10050	SDR10050W	SDR10050E	SDR10050B	100×50	200~250pcs	
SDR12555	SDR12555W	SDR12555E	SDR12555B	125×55	220~270pcs	
SDR2060	SDR2060W	SDR2060E	SDR2060B	20×60	5~45pcs	
SDR2560	SDR2560W	SDR2560E	SDR2560B	25×60	40~50pcs	
SDR3060	SDR3060W	SDR3060E	SDR3060B	30×60	60~80pcs	
SDR3560	SDR3560W	SDR3560E	SDR3560B	35×60	65~85pcs	
SDR4060	SDR4060W	SDR4060E	SDR4060B	40×60	100~115pcs	
SDR4560	SDR4560W	SDR4560E	SDR4560B	45×60	110~125pcs	
SDR5060	SDR5060W	SDR5060E	SDR5060B	50×60	120~135pcs	
SDR6060	SDR6060W	SDR6060E	SDR6060B	60×60	20~135pcs	每支 2米 含槽底槽盖
SDR8060	SDR8060W	SDR8060E	SDR8060B	80×60	180~210pcs	
SDR10060	SDR10060W	SDR10060E	SDR10060B	100×60	240~290pcs	
SDR11060	SDR11060W	SDR11060E	SDR11060B	110×60	50~300pcs	
SDR12060	SDR12060W	SDR12060E	SDR12060B	120×60	260~320pcs	
SDR15060	SDR15060W	SDR15060E	SDR15060B	150×60	300~360pcs	
SDR2565	SDR2565W	SDR2565E	SDR2565B	25×65	40~50pcs	
SDR3365	SDR3365W	SDR3365E	SDR3365B	33×65	40~70pcs	
SDR4565	SDR4565W	SDR4565E	SDR4565B	45×65	110~120pcs	
SDR6565	SDR6565W	SDR6565E	SDR6565B	65×65	180~200pcs	
SDR7265	SDR7265W	SDR7265E	SDR7265B	72×65	190~210pcs	Pcs/Branch 2M Including tuning and lids
SDR2575	SDR2575W	SDR2575E	SDR2575B	25×75	140~170pcs	
SDR3575	SDR3575W	SDR3575E	SDR3575B	35×75	160~190pcs	
SDR5075	SDR5075W	SDR5075E	SDR5075B	50×75	180~210pcs	
SDR7575	SDR7575W	SDR7575E	SDR7575B	75×75	200~240pcs	
SDR10075	SDR10075W	SDR10075E	SDR10075B	100×75	250~290pcs	
SDR2580	SDR2580W	SDR2580E	SDR2580B	25×80	100~120pcs	
SDR3080	SDR3080W	SDR3080E	SDR3080B	30×80	110~125pcs	
SDR3580	SDR3580W	SDR3580E	SDR3580B	35×80	110~130pcs	
SDR4080	SDR4080W	SDR4080E	SDR4080B	40×80	140~160pcs	
SDR4580	SDR4580W	SDR4580E	SDR4580B	45×80	140~160pcs	每支 2米 含槽底槽盖
SDR5080	SDR5080W	SDR5080E	SDR5080B	50×80	160~180pcs	
SDR5580	SDR5580W	SDR5580E	SDR5580B	55×80	160~180pcs	
SDR6080	SDR6080W	SDR6080E	SDR6080B	60×80	180~210pcs	
SDR8080	SDR8080W	SDR8080E	SDR8080B	80×80	240~290pcs	
SDR10080	SDR10080W	SDR10080E	SDR10080B	100×80	260~350pcs	
SDR12080	SDR12080W	SDR12080E	SDR12080B	120×80	280~380pcs	
SDR14080	SDR14080W	SDR14080E	SDR14080B	140×80	350~450pcs	
SDR25100	SDR25100W	SDR25100E	SDR25100B	25×100	110~160pcs	
SDR33100	SDR33100W	SDR33100E	SDR33100B	33×100	130~165pcs	Pcs/Branch 2M Including tuning and lids
SDR40100	SDR40100W	SDR40100E	SDR40100B	40×100	130~175pcs	
SDR50100	SDR50100W	SDR50100E	SDR50100B	50×100	220~250pcs	
SDR60100	SDR60100W	SDR60100E	SDR60100B	60×100	240~290pcs	
SDR70100	SDR70100W	SDR70100E	SDR70100B	70×100	250~340pcs	
SDR75100	SDR75100W	SDR75100E	SDR75100B	75×100	260~350pcs	
SDR80100	SDR80100W	SDR80100E	SDR80100B	80×100	260~350pcs	
SDR100100	SDR100100W	SDR100100E	SDR100100B	100×100	300~400pcs	
SDR120100	SDR120100W	SDR120100E	SDR120100B	120×100	350~450pcs	
SDR150100	SDR150100W	SDR150100E	SDR150100B	150×100	400~650pcs	
SDR100130	SDR100130W	SDR100130E	SDR100130B	100×130	350~450pcs	
SDR150130	SDR150130W	SDR150130E	SDR150130B	150×130	400~500pcs	
SDR200100	SDR200100W	SDR200100E	SDR200100B	200×100	600~800pcs	
SDR200150	SDR200150W	SDR200150E	SDR200150B	200×150	900~1200pcs	
SDR200200	SDR200200W	SDR200200E	SDR200200B	200×200	1200~1600pcs	

RCCN 日成SDR型密封环保阻燃线槽 Solid Wiring Duct

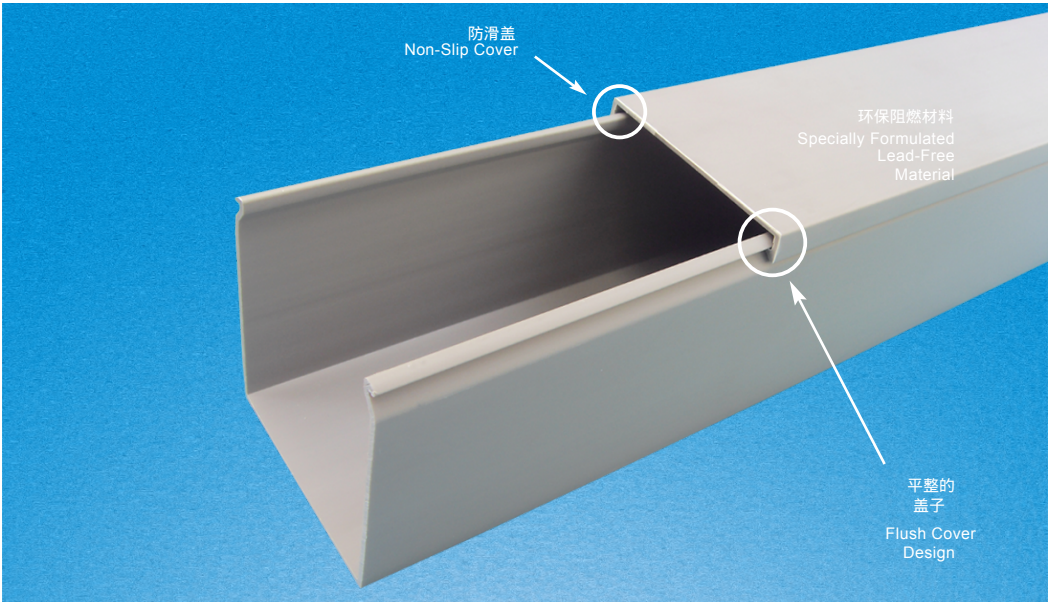

特点/Features	优点/Advantages	益处/Benefits
环保阻燃材料 Rohs approved Enviroment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
防滑盖 (non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover designGreater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers'request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, EuropeCE ,ROHS,REACH Flamility and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在世界各地均可放心使用 Can provide related certificates of the projects or parts need

