



D20906B vehicle low-voltage wiring harness


Vehicle low-voltage wiring harness, new energy automotive wiring harness processing

- 1. All the circuits connected to the motor end of the motor are connected with a solid twisted pair shield, and the three pairs of differential signals are used to satisfy the set of twisted pairs respectively.
 - 2. The vehicle side and the motor controller connected to the circuit, the vehicle CAN and debugging CAN use a solid twisted pair shielded wire
 - 3. Wire harness used in all the wire, can reach 80 °C long-term normal work
- According to map processing to meet your various needs of customization



Harness processing automotive wiring harness wiring harness

Specification

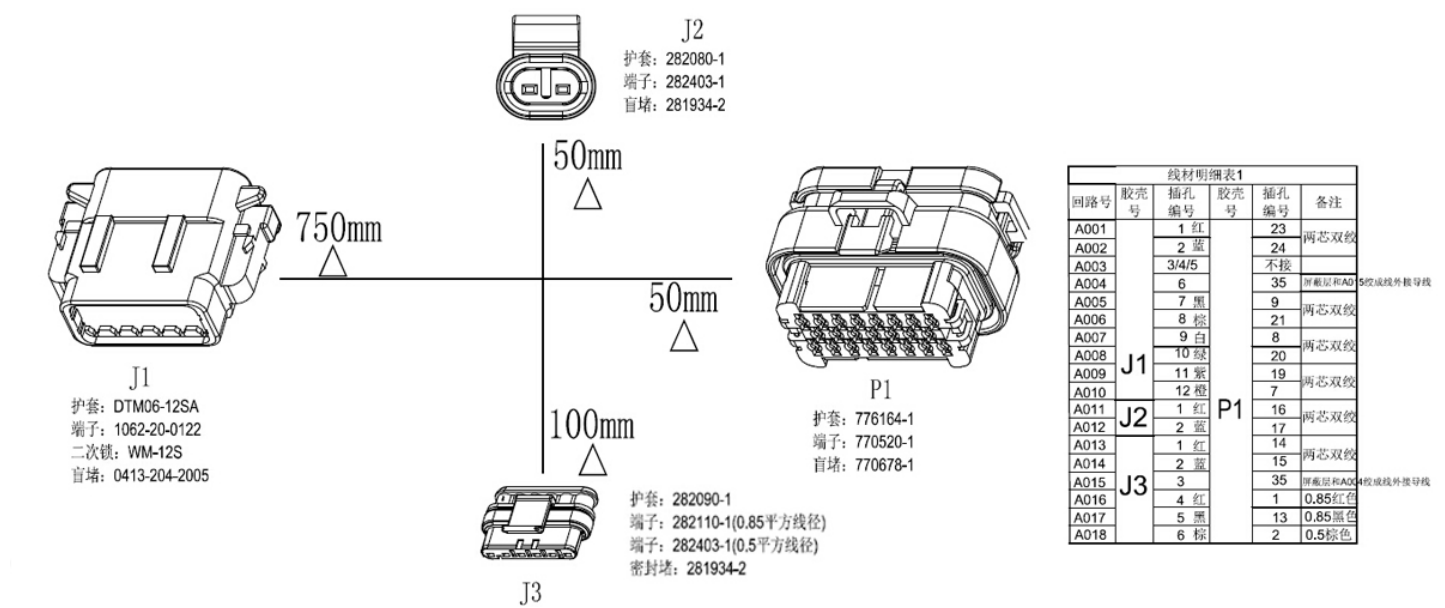

Product Show

