



ZL ventilation filter group

ZL ventilation filter group

Ventilator body material: flame retardant grade ABS resin, with anti-ultraviolet and electrostatic effects;

Filter material: the choice of imported nylon fiber synthetic resin


Ventilation: the use of 45-degree angle long, innovative design, nice, with a variety of waterproof and dustproof design

Dust removal rate: dust removal rate of up to 80% effective to prevent dust into the internal control cabinet

Effective air flow: 12.0 (M3 / min) Maximum wind speed: 1.5 (M / Sec)

Indoor temperature: -10 °C ~ 55 °C Fire rating: 94V-0, UL

Protection class: IP44




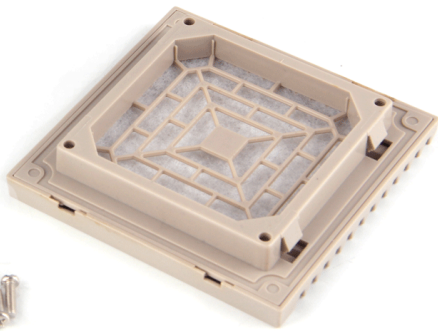


Ventilation filter ventilation filter group ventilation filter group blinds


Specification

ZL-802


ZL-803

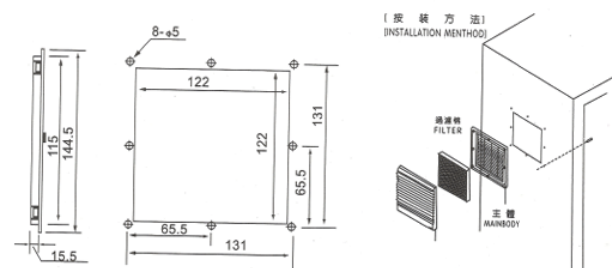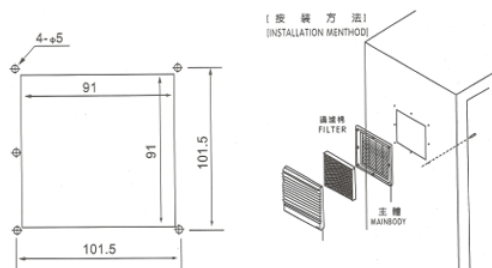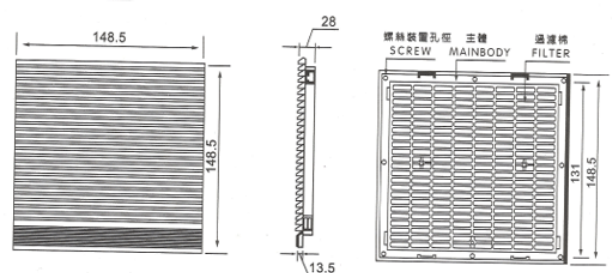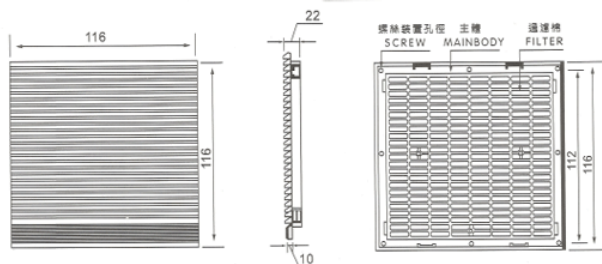

ZL-804

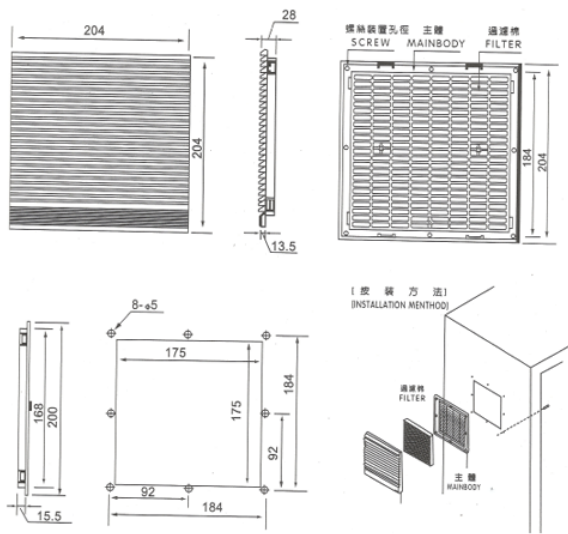

ZL-805

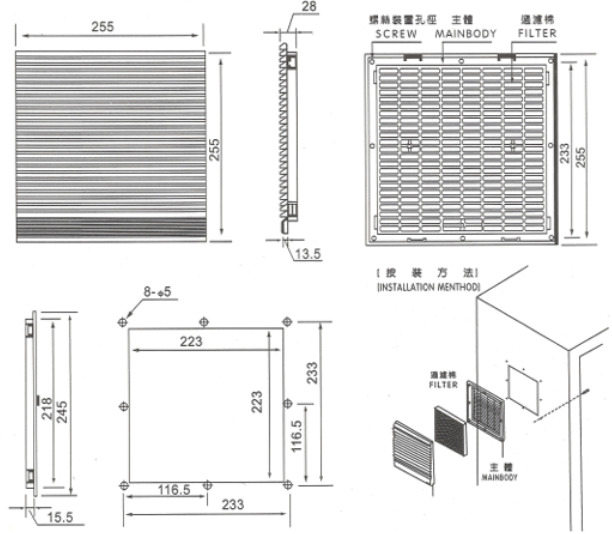

| Model No. | length(mm) | width(mm) | thickness(mm) | weight(g) | Appropriate types |
|-----------|------------|-----------|---------------|-----------|----------------------|
| ZL-802 | 116 | 116 | 10 | 80 | 9225.9238all9cmfan |
| ZL-803 | 148.5 | 148.5 | 13.5 | 156 | 11025.12025.12038fan |
| ZL-804 | 204 | 204 | 13.5 | 270 | 12038.15050.17251fan |
| ZL-805 | 255 | 255 | 13.5 | 436 | 17251.18060.22060fan |

Product Show

