



PB external thread T-type three-way pipe joint

PB external thread T-type three-way pipe joint

Material: plastic socket: POM, body: PBT, adapter: brass

Operating pressure range: 0-10kgf/cm²

Operating temperature range: -20~70°C

General hose: PU tube or nylon hose


Color: plastic socket: blue, body: black, adapter: brass (no plating)

Product Features

- 1. It has a variety of models and specifications and is used in various pneumatic systems.
- 2. Excellent flow performance, can pass the flow of the same volume as the inner diameter of the trachea.
- 3. The threaded part is coated with sealant to ensure that there is no leakage in the threaded connection part.

PB external thread T-type three-way pipe joint

Specification



RoHS

Item No.	ØD	Connection thread	package/PCS
PB4-M5	4	M5x0.8	100
PB4-01	4	PT1/8	100
PB4-02	4	PT1/4	100
PB4-04	4	PT1/2	100
PB6-M5	6	M5x0.8	100
PB6-01	6	PT1/8	100
PB6-02	6	PT1/4	100
PB6-03	6	PT3/8	100
PB6-04	6	PT1/2	100
PB8-01	8	PT1/8	100
PB8-02	8	PT1/4	100
PB8-03	8	PT3/8	100
PB8-04	8	PT1/2	100
PB10-01	10	PT1/8	50
PB10-02	10	PT1/4	50
PB10-03	10	PT3/8	50
PB10-04	10	PT1/2	50
PB12-01	12	PT1/8	50
PB12-02	12	PT1/4	50
PB12-03	12	PT3/8	50
PB12-04	12	PT1/2	25


Product Show



零部件拆解，全方位解析

PARTS DISMANTLING, COMPREHENSIVE ANALYSIS

追求每个零件的完美统一

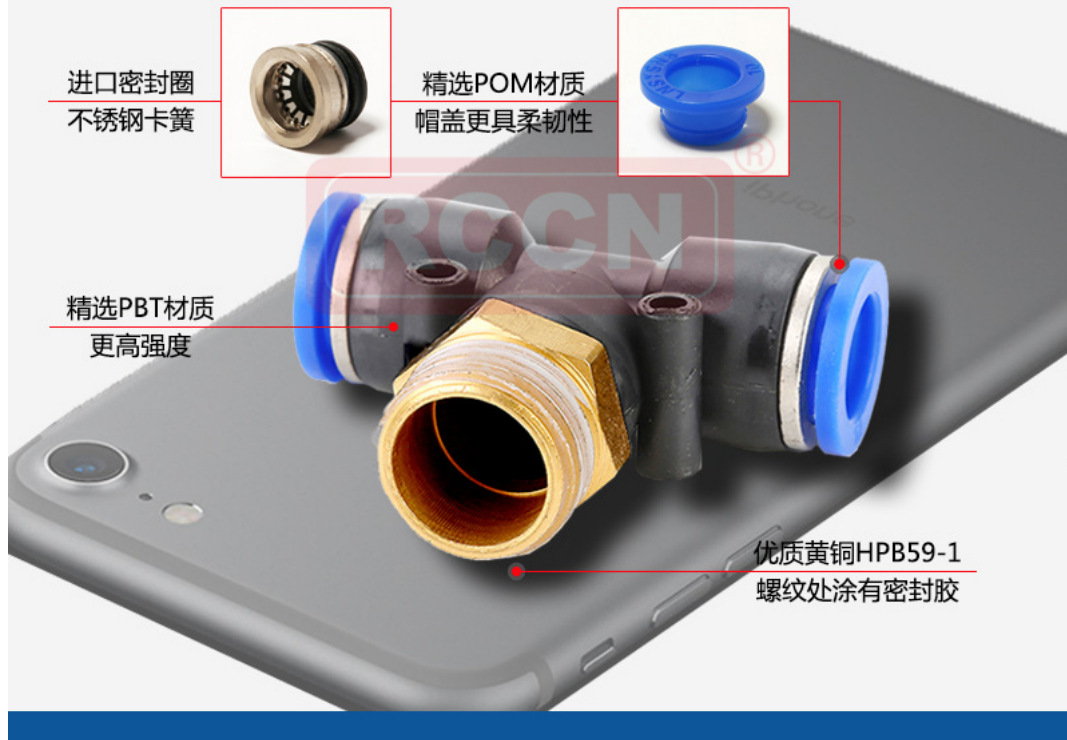

Push-in fittings

快插接头 PB外螺纹三通





种类齐全
规格多样



密封性能佳
螺纹采用预涂四氟乙烯胶，密封性能好

