



LC-CDXT1200 Avehicle low voltage wiring harness


LC-CDXT1200 Avehicle low voltage wiring harness

- 1, to meet ROHS requirements
- 2, the working temperature; -40 ~ +125 °C / 150 °C
- 3, waterproof rating: IP67
- 4, wiring harness for the "point" to "point" between the distance, in addition to special requirements
- 5, wiring harness 100% conduction test, no short circuit, open circuit, wrong road phenomenon;
- 6, flame retardant grade: UL94V-0
- 7, to meet the ELV requirements;
- 8, the wiring harness assembly The remaining technical requirements should be QC-T 1037-2016 road vehiclesWith high voltage cable standard requirements



Low - voltage wire harness vehicle wiring harness harness processing

Specification

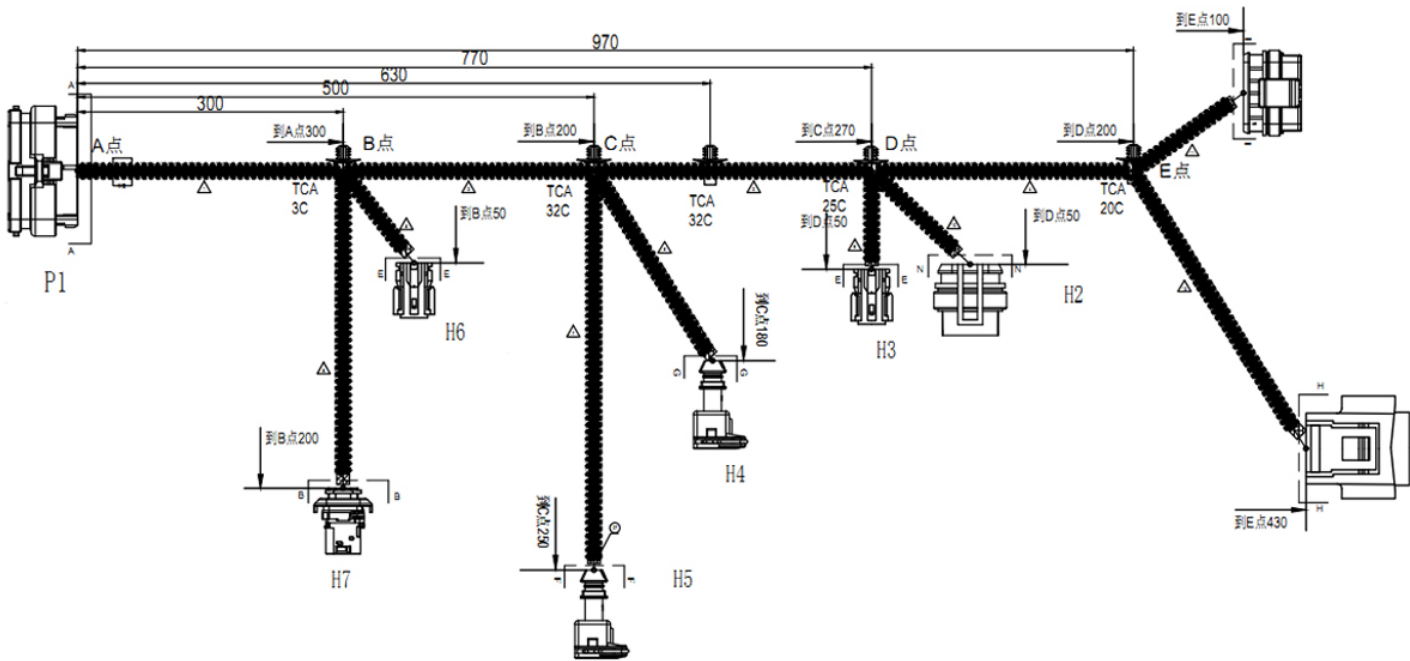

Product Show

