


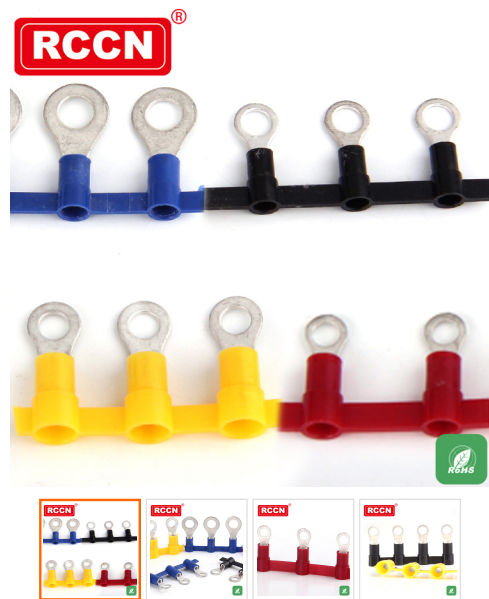

With circular pre-insulated terminal RFN

With circular pre-insulated terminal RFN

Product Material: Terminal made of high quality copper, good conductivity, high quality PA66 coat, durability is not easy to aging.

Features: The use of high-quality matte plating, greatly extended anti-rust time, no sharp parts; supporting the daily terminal crimping tools can be pressed wire, beautiful wiring,



International Certification: EU RoHS environmental certification, the European CE certification.

Product Features: Excellent quality, no crack after cracking loose open, -40 degrees heat to 85 degrees normal use, withstanding voltage 600V.

How to use: peel the wire skin, into the terminal after the brass

Terminals insulated terminals cold terminals with connecting terminals

Specification

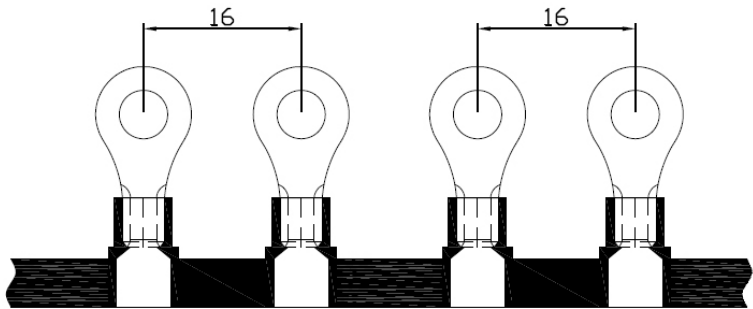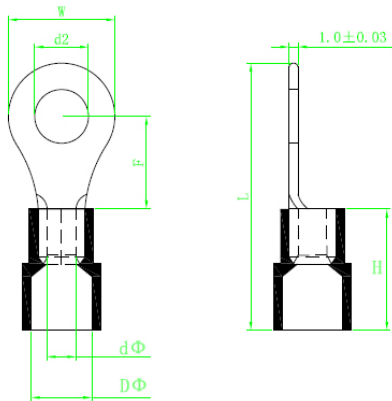

Ttem No.	AWG/mm2 Maximum current package	DIMENSION								Color
		Bolt specifications d2		W	F	L	H	DΦ	dΦ	
		Stud Size	mm	mm	mm	mm	mm	mm	mm	
RF1.25-3N Together	22-16 0.5-1.5 19A 2000PCS/Rol	#4	3.2	5.7	5.0	18.5	10.5	4.0	1.7	红 Red
RFS1.25 - 3.5N Together		#6	3.7	5.7	5.0	18.5				
RFM1.25-3.5N Together		#6	3.7	6.6	6.3	20				
RFL1.25-3.5N Together		#6	3.7	8.0	7.0	21.5				
RFS1.25-4N Together		#8	4.3	6.6	6.3	19.5				
RFL1.25-4N Together		#8	4.3	8.0	7.0	21.5				
RFS1.25-5N Together		#10	5.3	8.0	7.0	21.5				
RFL1.25-5N Together		#10	5.3	9. 8	8.0	23				
RFS1.25-6N Together		1/4	6.4	9. 8	8.0	23.5				
RFL1.25-6N Together		1/4	6.4	11.6	11.0	27.5				
RF1.25-8N Together		5/16	8.4	11.6	11.0	27.5				
RF1.25-10N Together		3/8	10.5	13.6	14.0	31.5				
RF2-3N Together		#4	3.2	6.6	4. 3	17.3				
RFS2-3.5N Together		#6	3.7	6.6	4. 3	17.3				
RFM2-3.5N Together		#6	3.7	6.6	6. 5	19.5				

RFL2-3.5N Together	16-14 1.5-2.5 27A 2000PCS/Rol	#6	3.7	8.5	7.7	21.8	10.5	4.6	2.3	Blue
RFS2-4N Together		#8	4.3	6.6	6.5	19.5				
RFL2-4N Together		#8	4.3	8.5	7.7	21.8				
RFS2-5N Together		#10	5.3	8.5	7.7	21.8				
RFL2-5N Together		#10	5.3	9.5	7.2	21.8				
RFS2-6N Together		1/4	6.4	9.5	7.2	21.8				
RFL2-6N Together		1/4	6.4	12.0	11.0	26.8				
RF2-8N Together		5/16	8.4	12.0	11.0	26.8				
RF2-10N Together		3/8	10.5	14.6	14.0	31.5				
RF3.5-4N Together		#8	4.3	8.0	7.7	24.5	14.2	6.5	3.0	Black
RFS3.5-5N Together	14-22 2.5-4.0 37A 1600PCS/Rol	#10	5.3	8.0	7.7	24.5				
RFL3.5-5N Together		#10	5.3	12.0	8.6	27.9				
RF3.5-6N Together		1/4	6.4	12.0	8.6	27.9				
RF3.5-8N Together		5/16	8.4	15.0	14.0	34.0				
RF3.5-10N Together		3/8	10.5	15.0	14.0	34.0				
RF5.5-3N Together	12-10 4.0-6.0 48A 1500PCS/Rol	#4	3.2	7.2	5.9	22.7	14.2	7.0	3.4	yellow
RF5.5-3.5N Together		#6	3.7	7.2	5.9	22.7				
RFS5.5-4N Together		#8	4.3	7.2	5.9	22.7				
RFL5.5-4N Together		#8	4.3	9.5	8.3	26.3				
RF5.5-5N Together		#10	5.5	9.5	8.3	26.3				
RF5.5-6N Together		1/4	6.4	12.0	11.0	30.0				
RF5.5-8N Together		5/16	8.4	15.0	13.7	34.5				
RF5.5-10N Together		3/8	10.5	15.0	13.7	34.5				

Product Show



