



RCJYZ Standoff Insulator M5

Series: M5

Insulation material using flame retardant (UL94V-0) high strength, excellent electrical properties of plastic;

There are three types of copper, aluminum and steel inserts to choose from;

Used in power supply or cabinet to play the role of insulation and support for live parts;

Insulation resistance greater than 500MΩ;

Working temperature: -30 ℃ ~ 120 ℃

According to customer requirements assembly screw;

Can be customized according to customer requirements of different colors;


Customers can request a variety of customized products.

RCJYZ Standoff Insulator RCJYZ Standoff Insulator M5

Specification


Item No.	Thread	External Sizes (mm) (OD*H)	Rated Voltage (V)	Withstand Voltage (V/min)	Max Thread Screw Moment (Kgf.cm)	Insulate Material	Color	Insert material
RCJYZ-03G	M5x5	Φ23.1*16	600	5000	400	BMC	Red	Copper
RCJYZ-08	M5x6.5	Φ20x20	400	1500	50	PF	Black	Copper
RCJYZ-20F(E)	M5x8 (Screw9.5mm)	Φ20*25	600	4000	80	BMC	Red	Copper
RCJYZ-23A (E)	M5x5	Φ20x20	600	3000	65	BMC PF(E)	Red	Copper
RCJYZ-25E	M5x9	Φ20x30	800	3000	100	BMC	Red	Copper
RCJYZ-27C	M5x6.5	Φ16.5*20	500	5000	60	PF	Red	Copper
RCJYZ-29F1	M5x5	Φ23.1*40	800	5000	80	BMC	Red	Copper
RCJYZ-29F	M5x10	Φ20x40	800	6000	100	BMC	Red	Copper
RCJYZ-37C	M5x6	Φ15*25	500	7000	50	BMC	Red	Copper
RCJYZ-108	M5x6	Φ16*25	600	3000	50	BMC	Red	Copper
RCJYZ-108A1	M5x6 (With screw) 8mm	Φ16*25	600	3000	50	BMC	Red	Copper
RCJYZ-125	M5x6	Φ16*30	600	5000	50	BMC	Red	Copper

Product Show


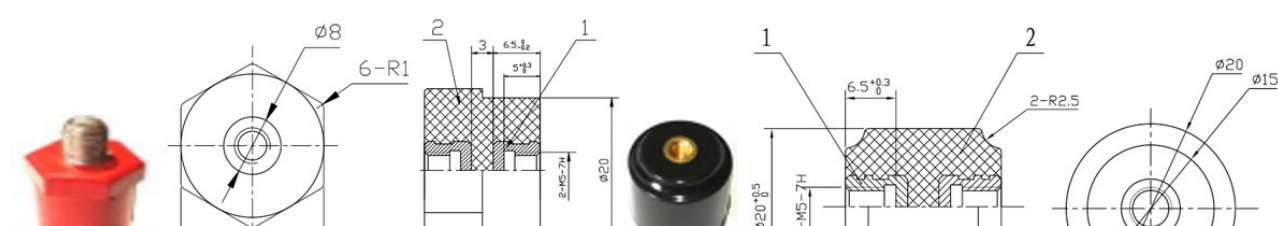








RCJYZ-03G





RCJYZ-08





RCJYZ-20F(E)





RCJYZ-23A (E型)





RCJYZ-25E






RCJYZ-27C





RCJYZ-29F1




RCJYZ-29F

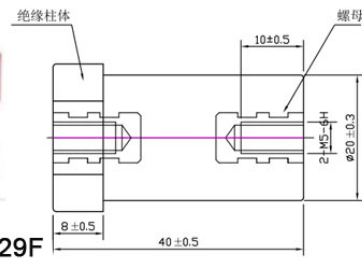

RCJYZ-37C



RCJYZ-108



RCJYZ-108A1

