


RCCN 日成VDRFZ型易折断环保阻燃线槽 Wide Slot Wiring Duct




出口推荐/Recommend

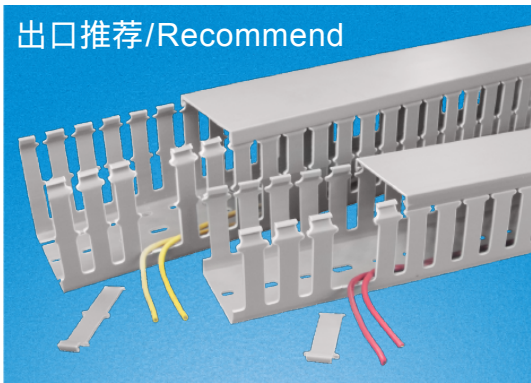


产品材质:采用低卤素硬质PVC料制成,环保无
污染,不含铅等有毒物。
产品认证:美国UL:E306674 欧洲CE:EN50085
欧洲环保RoHS,REACH。
防火等级:UL94V-0,低烟微卤,遇火不燃烧,防
火性及绝缘性特佳。
产品构造:由槽底及槽盖组成,底槽两侧设有
出线孔。
颜 色 :灰色,白色,蓝色,黑色
工作温度 :静态-40°C持续高温至65°C , 短时
间可达85°C。
使用方法:先将底槽固定,将所要配的线装入
槽内,盖上槽盖即可。
产品特性 : 1.反扣式槽盖与槽体设计组合后
绝不脱落,且接合面平滑,
不割伤手及擦损附近配线。
2.配线槽65°C内不易断裂,变形,
变色,装配省时便利。
3.出线孔低、组合容易、拆卸简
单、易于配线。
4.易折断型为内部两侧带折痕设计,
可依安装者需求,折出需要的边
孔大小。更多选择:量大可按需求
生产所需规格或定制长度。
例:VDR8080FZ(L=1.7M)

Wide slot/finger design provides
greater sidewall rigidity and can
be used with a wide range of wire
bundle sizes。
Certificates:UL:E306674
CE:EN50085 RoHS,REACH。
Made of rigid PVC
Work Temperature:-40°C to 65°C
UL94 Flammability Rating of V-0
Provided with mounting holes
Available color:gray.white.blue.black
and other special colors
Special design: with score line at the
base of trunking, it makes
the fingers easy to separate from the
trunking no need to us cutter.


推荐 : 灰色为常规库存产品,其它颜色有起订量要求。
Comment:gray is standard color,other color come with MOQ.



样式 : 16mm-72mm宽
Style : Width from 16mm to 72mm



样式 : 75mm-140mm宽
Style : Width from 75mm to 140mm



大小孔型号/Eu hole size : HVDR4060F/614


单位/Unit:mm

型号 Item No.				宽 × 高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
VDR1525FZ	VDR1525FZW	VDR1525FZE	VDR1525FZB	15×25	8	10	5~15pcs	每支 2米
VDR2025FZ	VDR2025FZW	VDR2025FZE	VDR2025FZB	20×25	8	10	5~15pcs	
VDR2525FZ	VDR2525FZW	VDR2525FZE	VDR2525FZB	25×25	8	10	10~25pcs	
VDR3025FZ	VDR3025FZW	VDR3025FZE	VDR3025FZB	30×25	8	10	12~28pcs	
VDR4025FZ	VDR4025FZW	VDR4025FZE	VDR4025FZB	40×25	8	10	20~35pcs	
VDR5025FZ	VDR5025FZW	VDR5025FZE	VDR5025FZB	50×25	8	10	12~28pcs	
VDR1530FZ	VDR1530FZW	VDR1530FZE	VDR1530FZB	15×30	8	12	8~15pcs	
VDR2030FZ	VDR2030FZW	VDR2030FZE	VDR2030FZB	20×30	8	12	25~35pcs	
VDR2530FZ	VDR2530FZW	VDR2530FZE	VDR2530FZB	25×30	8	12	25~35pcs	
VDR3030FZ	VDR3030FZW	VDR3030FZE	VDR3030FZB	30×30	8	12	25~35pcs	
VDR4030FZ	VDR4030FZW	VDR4030FZE	VDR4030FZB	40×30	8	12	30~40pcs	含槽底槽盖
VDR5030FZ	VDR5030FZW	VDR5030FZE	VDR5030FZB	50×30	8	12	40~50pcs	
VDR6030FZ	VDR6030FZW	VDR6030FZE	VDR6030FZB	60×30	8	12	50~60pcs	
VDR2233FZ	VDR2233FZW	VDR2233FZE	VDR2233FZB	22×33	6	10.5	25~35pcs	
VDR3333FZ	VDR3333FZW	VDR3333FZE	VDR3333FZB	33×33	8	12	35~45pcs	
VDR2035FZ	VDR2035FZW	VDR2035FZE	VDR2035FZB	20×35	8	12	30~40pcs	
VDR3535FZ	VDR3535FZW	VDR3535FZE	VDR3535FZB	35×35	8	12	35~45pcs	
VDR5035FZ	VDR5035FZW	VDR5035FZE	VDR5035FZB	50×35	8	12	40~60pcs	
VDR2040FZ	VDR2040FZW	VDR2040FZE	VDR2040FZB	20×40	8	12	16~22pcs	
VDR2540FZ	VDR2540FZW	VDR2540FZE	VDR2540FZB	25×40	8	12	20~35pcs	
VDR3540FZ	VDR3540FZW	VDR3540FZE	VDR3540FZB	35×40	8	12	30~45pcs	Including tuning and lids
VDR4040FZ	VDR4040FZW	VDR4040FZE	VDR4040FZB	40×40	8	12	60~70pcs	
VDR6040FZ	VDR6040FZW	VDR6040FZE	VDR6040FZB	60×40	8	12	100~115pcs	
VDR8040FZ	VDR8040FZW	VDR8040FZE	VDR8040FZB	80×40	8	12	120~135pcs	
VDR10040FZ	VDR10040FZW	VDR10040FZE	VDR10040FZB	100×40	8	12	120~135pcs	
VDR12040FZ	VDR12040FZW	VDR12040FZE	VDR12040FZB	120×40	8	12	140~155pcs	

RCCN 日成VDRFZ型易折断环保阻燃线槽 Wide Slot Wiring Duct

型号 Item No.				宽 × 高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
VDR2545FZ	VDR2545FZW	VDR2545FZE	VDR2545FZB	25×45	8	12	20~25pcs	每支 2米 含槽底槽盖
VDR3345FZ	VDR3345FZW	VDR3345FZE	VDR3345FZB	33×45	8	12	40~55pcs	
VDR4545FZ	VDR4545FZW	VDR4545FZE	VDR4545FZB	45×45	8	12	60~70pcs	
VDR6545FZ	VDR6545FZW	VDR6545FZE	VDR6545FZB	65×45	8	12	110~120pcs	
VDR2050FZ	VDR2050FZW	VDR2050FZE	VDR2050FZB	20×50	8	12	18~28pcs	
VDR2550FZ	VDR2550FZW	VDR2550FZE	VDR2550FZB	25×50	8	12	20~30pcs	
VDR3050FZ	VDR3050FZW	VDR3050FZE	VDR3050FZB	30×50	8	12	25~40pcs	
VDR3550FZ	VDR3550FZW	VDR3550FZE	VDR3550FZB	35×50	8	12	40~60pcs	
VDR4050FZ	VDR4050FZW	VDR4050FZE	VDR4050FZB	40×50	8	12	60~70pcs	
VDR4550FZ	VDR4550FZW	VDR4550FZE	VDR4550FZB	45×50	8	12	70~80pcs	
VDR5050FZ	VDR5050FZW	VDR5050FZE	VDR5050FZB	50×50	8	12	80~90pcs	Pcs/Branch 2M Including tuning and lids
VDR5550FZ	VDR5550FZW	VDR5550FZE	VDR5550FZB	55×50	8	12	85~95pcs	
VDR6050FZ	VDR6050FZW	VDR6050FZE	VDR6050FZB	60×50	8	12	100~120pcs	
VDR7550FZ	VDR7550FZW	VDR7550FZE	VDR7550FZB	75×50	8	12	150~170pcs	
VDR8050FZ	VDR8050FZW	VDR8050FZE	VDR8050FZB	80×50	8	12	160~180pcs	
VDR10050FZ	VDR10050FZW	VDR10050FZE	VDR10050FZB	100×50	8	12	200~250pcs	
VDR12555FZ	VDR12555FZW	VDR12555FZE	VDR12555FZB	125×55	8	8	220~270pcs	
VDR2060FZ	VDR2060FZW	VDR2060FZE	VDR2060FZB	20×60	8	12	35~45pcs	
VDR2560FZ	VDR2560FZW	VDR2560FZE	VDR2560FZB	25×60	8	12	40~50pcs	
VDR3060FZ	VDR3060FZW	VDR3060FZE	VDR3060FZB	30×60	8	12	60~80pcs	
VDR3560FZ	VDR3560FZW	VDR3560FZE	VDR3560FZB	35×60	8	12	90~105pcs	每支 2米 含槽底槽盖
VDR4060FZ	VDR4060FZW	VDR4060FZE	VDR4060FZB	40×60	8	12	100~115pcs	
VDR4560FZ	VDR4560FZW	VDR4560FZE	VDR4560FZB	45×60	8	12	110~125pcs	
VDR5060FZ	VDR5060FZW	VDR5060FZE	VDR5060FZB	50×60	8	12	120~135pcs	
VDR6060FZ	VDR6060FZW	VDR6060FZE	VDR6060FZB	60×60	8	12	120~135pcs	
VDR8060FZ	VDR8060FZW	VDR8060FZE	VDR8060FZB	80×60	8	12	180~210pcs	
VDR10060FZ	VDR10060FZW	VDR10060FZE	VDR10060FZB	100×60	8	12	240~290pcs	
VDR11060FZ	VDR11060FZW	VDR11060FZE	VDR11060FZB	110×60	8	12	250~300pcs	
VDR12060FZ	VDR12060FZW	VDR12060FZE	VDR12060FZB	120×60	8	12	260~320pcs	
VDR15060FZ	VDR15060FZW	VDR15060FZE	VDR15060FZB	150×60	8	12	300~360pcs	
VDR2565FZ	VDR2565FZW	VDR2565FZE	VDR2565FZB	25×65	8	12	40~50pcs	每支 2米 含槽底槽盖
VDR3365FZ	VDR3365FZW	VDR3365FZE	VDR3365FZB	33×65	8	12	40~70pcs	
VDR4565FZ	VDR4565FZW	VDR4565FZE	VDR4565FZB	45×65	8	12	110~120pcs	
VDR6565FZ	VDR6565FZW	VDR6565FZE	VDR6565FZB	65×65	8	12	180~200pcs	
VDR7265FZ	VDR7265FZW	VDR7265FZE	VDR7265FZB	72×65	8	12	180~230pcs	
VDR2575FZ	VDR2575FZW	VDR2575FZE	VDR2575FZB	25×75	8	12	160~190pcs	
VDR3575FZ	VDR3575FZW	VDR3575FZE	VDR3575FZB	35×75	8	12	170~200pcs	
VDR5075FZ	VDR5075FZW	VDR5075FZE	VDR5075FZB	50×75	8	12	180~210pcs	
VDR7575FZ	VDR7575FZW	VDR7575FZE	VDR7575FZB	75×75	8	12	200~240pcs	
VDR10075FZ	VDR10075FZW	VDR10075FZE	VDR10075FZB	100×75	8	12	250~290pcs	
VDR2580FZ	VDR2580FZW	VDR2580FZE	VDR2580FZB	25×80	8	12	100~120pcs	Pcs/Branch 2M Including tuning and lids
VDR3080FZ	VDR3080FZW	VDR3080FZE	VDR3080FZB	30×80	8	12	110~125pcs	
VDR3580FZ	VDR3580FZW	VDR3580FZE	VDR3580FZB	35×80	8	12	110~130pcs	
VDR4080FZ	VDR4080FZW	VDR4080FZE	VDR4080FZB	40×80	8	12	140~160pcs	
VDR4580FZ	VDR4580FZW	VDR4580FZE	VDR4580FZB	45×80	8	12	140~160pcs	
VDR5080FZ	VDR5080FZW	VDR5080FZE	VDR5080FZB	50×80	8	12	160~180pcs	
VDR5580FZ	VDR5580FZW	VDR5580FZE	VDR5580FZB	55×80	8	12	160~180pcs	
VDR6080FZ	VDR6080FZW	VDR6080FZE	VDR6080FZB	60×80	8	12	180~210pcs	
VDR8080FZ	VDR8080FZW	VDR8080FZE	VDR8080FZB	80×80	8	12	240~290pcs	
VDR10080FZ	VDR10080FZW	VDR10080FZE	VDR10080FZB	100×80	8	12	260~350pcs	
VDR12080FZ	VDR12080FZW	VDR12080FZE	VDR12080FZB	120×80	8	12	280~380pcs	每支 2米 含槽底槽盖
VDR14080FZ	VDR14080FZW	VDR14080FZE	VDR14080FZB	140×80	8	12	350~450pcs	
VDR16080FZ	VDR16080FZW	VDR16080FZE	VDR16080FZB	160×80	8	12	450~550pcs	
VDR25100FZ	VDR25100FZW	VDR25100FZE	VDR25100FZB	25×100	8	12	110~160pcs	
VDR33100FZ	VDR33100FZW	VDR33100FZE	VDR33100FZB	33×100	8	12	130~165pcs	
VDR40100FZ	VDR40100FZW	VDR40100FZE	VDR40100FZB	40×100	8	12	130~175pcs	
VDR50100FZ	VDR50100FZW	VDR50100FZE	VDR50100FZB	50×100	8	12	220~250pcs	
VDR60100FZ	VDR60100FZW	VDR60100FZE	VDR60100FZB	60×100	8	12	240~290pcs	
VDR70100FZ	VDR70100FZW	VDR70100FZE	VDR70100FZB	70×100	8	12	250~340pcs	
VDR75100FZ	VDR75100FZW	VDR75100FZE	VDR75100FZB	75×100	8	12	260~350pcs	
VDR80100FZ	VDR80100FZW	VDR80100FZE	VDR80100FZB	80×100	8	12	260~350pcs	每支 2米 含槽底槽盖
VDR100100FZ	VDR100100FZW	VDR100100FZE	VDR100100FZB	100×100	8	12	300~400pcs	
VDR120100FZ	VDR120100FZW	VDR120100FZE	VDR120100FZB	120×100	8	12	350~450pcs	
VDR150100FZ	VDR150100FZW	VDR150100FZE	VDR150100FZB	150×100	8	12	400~650pcs	
VDR160100FZ	VDR160100FZW	VDR160100FZE	VDR160100FZB	160×100	8	12	500~750pcs	
VDR100130FZ	VDR100130FZW	VDR100130FZE	VDR100130FZB	100×130	8	12	350~450pcs	
VDR150130FZ	VDR150130FZW	VDR150130FZE	VDR150130FZB	150×130	8	12	400~500pcs	
VDR200100FZ	VDR200100FZW	VDR200100FZE	VDR200100FZB	200×100	8	12	600~800pcs	
VDR200150FZ	VDR200150FZW	VDR200150FZE	VDR200150FZB	200×150	8	12	900~1200pcs	

RCCN 日成VDRFZ型易折断环保阻燃线槽 Wide Slot Wiring Duct

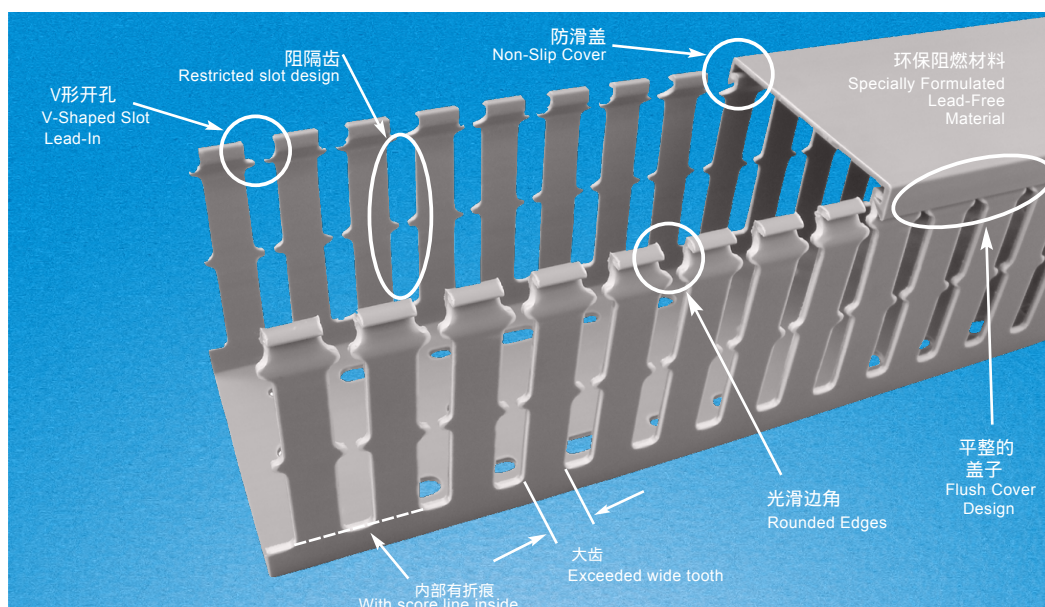

特点/Features	优点/Advantages	益处/Benefits
大的齿和大的孔 Wide finger and slot design Can be used with a wide range of wire and	齿宽有12mm,孔宽8mm,齿硬度大 Finger 12mm Slot 8 mm,Rigid fingers	适用于较大的电线 bundle sizes
环保阻燃材料 Rohs approved Enviroment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
易折断型结构 Smooth rounded edges	方便安装时根据需要的侧孔大小走线折断齿 Exclusive RCCN ® process rounds the edges in duct slots and at top of duct fingers	减少安装时间,断面平整美观 Protects hands and wiring/cabling from abrasion
防滑盖 non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover designGreater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
冲孔断面/Slot smooth	冲孔后齿的表面平整光滑 Smooth edge after punching	不用修毛刺,节省时间 No need to get offer abrasion, save time
V型开孔设计 V-shaped slot lead-in V-shape funnels wires into slot for	V型槽孔使电线更易装入 Easier insertion	加快电线安装 Speeds wire installation
阻隔齿设计 Restricted slot designOnce inserted wires are retained in the slot	电线装入后不会晃动,不管是否扣盖子 也可用于电线功能不同的分类 with or without the cover being installed	安装时避免线跑出槽不必要的麻烦,节省时间 Eliminates hassle and saves time during installation and maintenance
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers'request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, EuropeCE ,ROHS,REACH Flamility and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在世界各地均可放心使用 Can provide related certificates of the projects or parts need



