


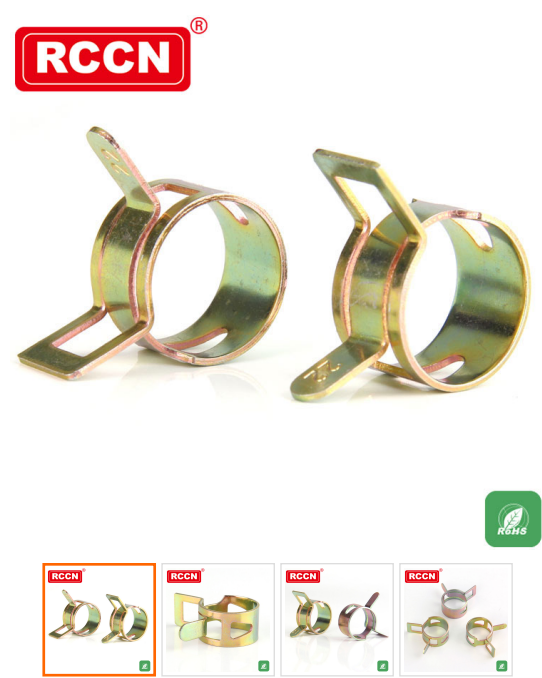

Elastic Clamp SBC

Elastic clamp, clamp, hose clamp

Material: made of high quality spring manganese steel


Elastic clip Product Features:

1. After sealing is a complete round even, sealing performance even better;
2. No burr edge treatment, effectively prevent damage to the pipeline;
3. After effective de-hydrogen treatment, long-term use do not have to worry about fracture and other issues;
4. Fully in line with the EU standard surface treatment, the Japanese side to provide direct technology, environmental corrosion resistance;
5. Easy to install;
6. Strict elasticity test to ensure high-intensity work environment.

Uses: automobile industry, auto parts industry, machinery industry, automation equipment, agriculture, bathroom, medical, plastic industry, mechanical oil, pipe joints and other petrochemical, agriculture and animal husbandry, mold, municipal, daily necessities, electronics and so on.

Elastic clamps clamps hose clamps

Specification

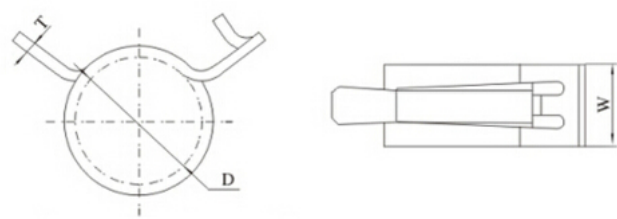

model	Nominal diameter	Delivery diameter	Full diameter	Minimum functional diameter	Material thickness	Clamping force
	mm	max mm	mm	mm	mm	min N
SBC-13	13	12.0	14.2	12.7	0.8	100
SBC-14	14	13.3	15.8	13.7	0.8	100
SBC-15	15	13.9	16.5	14.7	0.8	130
SBC-16	16	14.9	17.5	15.7	0.8	160
SBC-17	17	15.6	18.5	16.3	0.8	160
SBC-18	18	16.0	19.0	17.3	0.8	200
SBC-19	19	17.8	20.2	18.3	1.3	300
SBC-20	20	18.4	21.6	19.3	1.3	200
SBC-21	21	19.4	22.5	20.3	1.3	200
SBC-22	22	20.5	24.2	21.3	1.3	200
SBC-23	23	21.0	24.7	22.3	1.3	320
SBC-24	24	22.0	26.0	23.3	1.3	230
SBC-25	25	23.5	26.8	24.0	1.3	260
SBC-26	26	24.3	28.0	25.0	1.7	270
SBC-27	27	25.2	29.2	26.0	1.7	280

SBC-28	28	26.1	30.2	27.0	1.7	300
SBC-29	29	27.0	31.5	28.0	1.7	300
SBC-30	30	28.0	32.5	29.0	1.7	300
SBC-32	32	23.3	34.5	31.0	1.7	300
SBC-34	34	30.6	36.4	33.0	1.7	300
SBC-35	35	31.5	38.0	34.0	1.7	300
SBC-36	36	32.5	39.0	35.0	1.7	300
SBC-38	38	34.5	41.5	37.0	1.7	300
SBC-40	40	35.5	42.5	39.0	1.7	300
SBC-41	41	36.3	43.5	39.5	2.1	340
SBC-42	42	37.2	44.5	40.5	2.1	340
SBC-43	43	37.9	45.5	41.5	2.1	340
SBC-44	44	38.5	46.5	42.5	2.1	340
SBC-46	46	40.5	48.5	44.5	2.1	350
SBC-47	47	41.4	50.5	45.5	2.1	380
SBC-49	49	42.5	52.0	47.5	2.1	410
SBC-50	50	43.5	53.0	48.5	2.1	410
SBC-51	51	44.0	54.0	49.5	2.1	410
SBC-53	53	46.0	55.8	51.5	2.1	410
SBC-55	55	46.8	58.0	53.5	2.1	430
SBC-60	60	51.5	64.0	58.5	2.6	450
SBC-65	65	57.5	70.0	63.5	2.6	370
SBC-70	70	61.5	73.0	68.5	2.6	370
SBC-75	75	65.0	78.0	73.5	2.6	330
SBC-80	80	70.0	84.0	78.5	2.6	300

Product Show



